


TECHNICAL INFORMATION



72170

- Subject** ▶ Change of Name Plate and Motor Housing,
Elimination of Rivet 0-5 and Rubber Pin 4.
- For Models** ▶ 9401, 9402
- Country** ▶ All countries
- Description** ▶ Name plate of metal have been replaced by the one of polyethylene telephthalate resin.
The tool for attaching the Name plate to Motor housing has also been changed
from Rivets to adhesive on the reverse of the Name plate itself.
Also, Rubber pin 4 has been eliminated from Motor housing.

The new Motor housing doesn't have the holes for the Rivets. Therefore, replace the current Name plate by the new one at the same time.

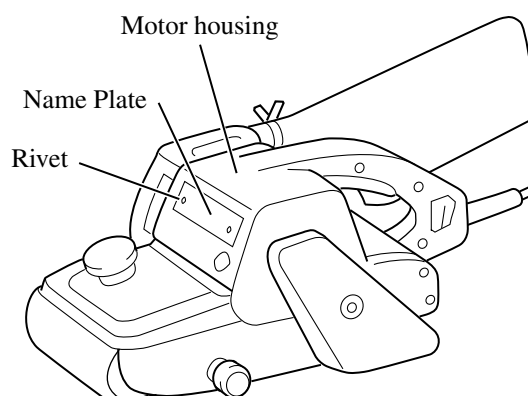

Interchangeability(I/C)

Item No.	Current part		Q'ty	I/C	New part		Q'ty	Note
019	Name Plate 9401 811732-2		1	No	Name Plate 9401 850166-4		1	For 9401
006	Name Plate 9402 854824-4		1	No	Name Plate 9402 850176-1		1	For 9402
9401: 018 9402: 005	Rivet 0-5 953106-2		2					
022	Motor Housing 156225-5		1	Yes	Motor Housing 156225-5		1	For 9401 Part No. remains the same.
002	Motor Housing 157148-0		1	Yes	Motor Housing 157148-0		1	For 9402 Part No. remains the same.
9401: 015 9402: 072	Rubber Pin 4 263002-9		1					The component part of Motor housing

Implementation

9401: From serial No. 674599E (November, 2004)
9402: From serial No. 91677E (December, 2004)